




SUN EARTH

THE **SUNBELT** SERIES

GLAZED FLAT PLATE SOLAR COLLECTORS
Model SB SPECIFICATION SHEET

THE VALUE LEADER IN SOLAR WATER HEATING TECHNOLOGY

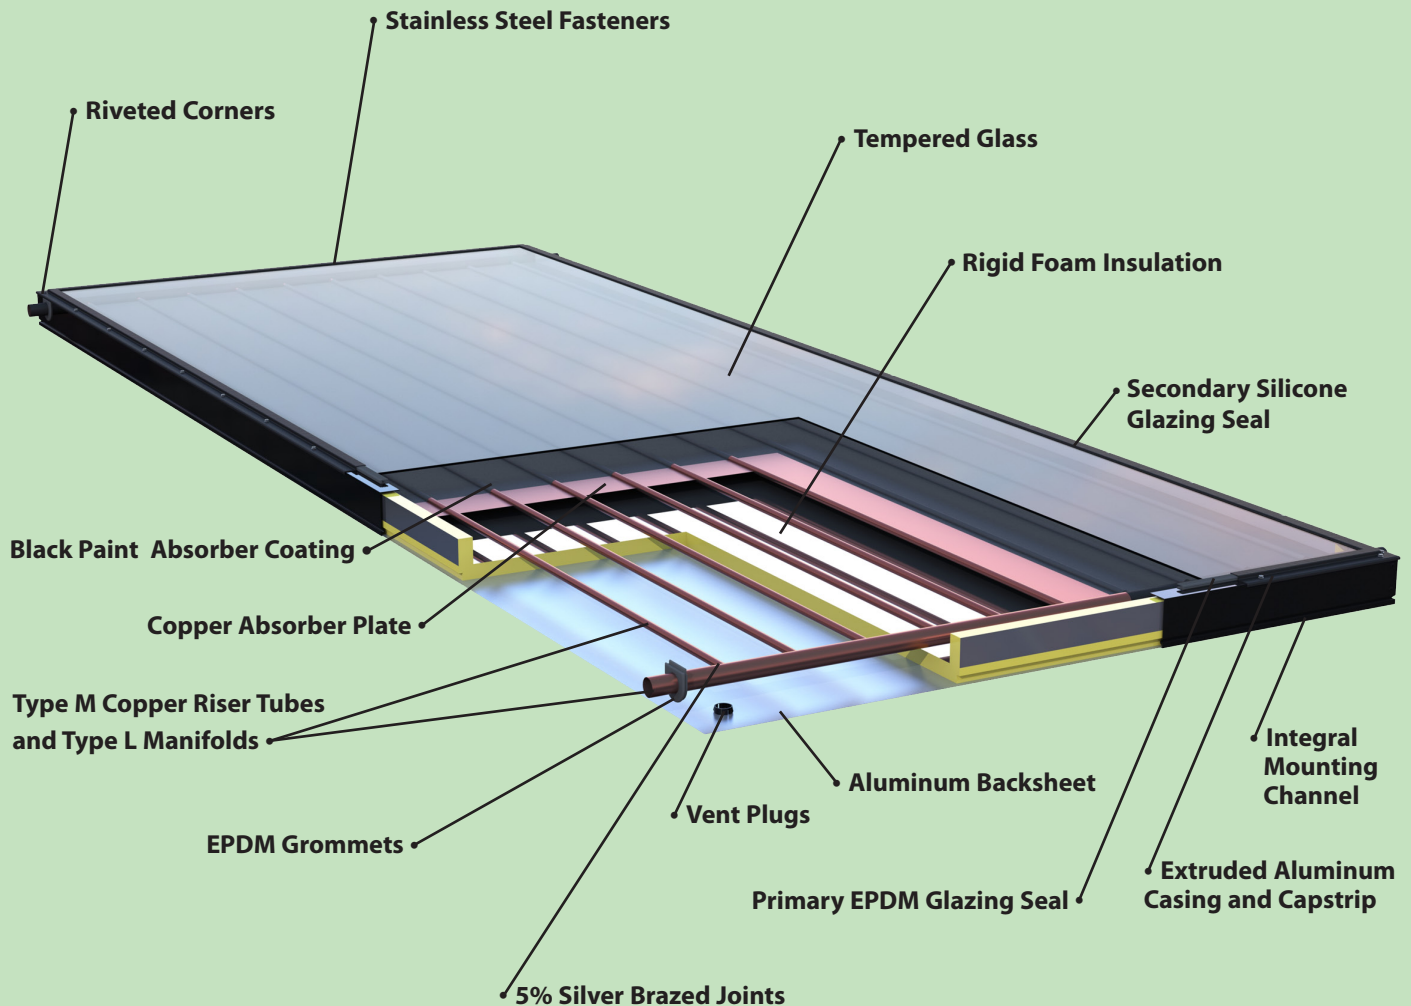

PROTECTING OUR ENVIRONMENT—SINCE 1978

SUN EARTH SUNBELT SERIES SPECIFICATIONS

SunEarth Model No.	Width Inches	Length Inches	Depth Inches	Gross Area Sq Ft	Net Aperture Sq Ft	Dry Weight, Lbs.	Fluid Capacity U.S. Gallons	Design Flow Rate GPM	Pressure Drop at Design Flow Rate in PSIG	Max Flow Rate GPM	Maximum Operating Pressure PSIG	Std. Header Width, Inches	Std. Header Diameter, Inches Nominal	Header, Center to Center, Inches
SB-24-075	36.2	98.2	3.25	24.67	21.79	79	0.78	0.62	0.0086	5	160	39.375	3/4	93.625
SB-32-075	48.2	98.2	3.25	32.87	29.63	105	1.00	0.83	0.0143	5	160	51.375	3/4	93.625
SB-40-075	48.2	122.2	3.25	40.90	37.21	140	1.20	1.04	0.025	5	160	51.375	3/4	115.625

ASTM E330 Maximim Test Load ±90 psf - Apply the appropriate factors of safety according to the test standards and local building code requirements when designing a solar thermal system

MODEL SB

THERMAL PERFORMANCE RATINGS*

MODEL SB

Category (Ti-Ta) <small>Ti = inlet fluid temp Ta = ambient air temp</small>	BTU/ft ² -Day		
	CLEAR DAY 2000 Btu/ft ² /Day	MILDLY CLOUDY DAY 1500 Btu/ft ² /Day	CLOUDY DAY 1000 Btu/ft ² /Day
A(-9°F)	1,327	1,015	699
B(9°F)	1,137	821	506
C(36°F)	853	546	252
D(90°F)	334	114	-
E(144°F)	-	-	-

Category (Ti-Ta) <small>Ti = inlet fluid temp Ta = ambient air temp</small>	kWh/ft ² -Day		
	CLEAR DAY 2000 Btu/ft ² /Day	MILDLY CLOUDY DAY 1500 Btu/ft ² /Day	CLOUDY DAY 1000 Btu/ft ² /Day
A(-9°F)	0.4	0.3	0.2
B(9°F)	0.3	0.2	0.1
C(36°F)	0.2	0.2	0.1
D(90°F)	0.1	0.0	-
E(144°F)	-	-	-

Ti = inlet fluid temp; Ta = ambient air temp. Category A/B-Pool Heating; C-Water Heating (Warm Climate); D-Water/Space Heating (Cool Climate); E- Process Heat. **Thermal performance is obtained by multiplying the collector output for the appropriate application and insulation level by the total gross collector area**
*Collector ratings are derived from the Solar Rating & Certification Corp (SRCC) Document RM-1 and Standard OG-100, tested with water at design flowrate.

ENGINEERING SPECIFICATIONS

(Performance specifications subject to testing error of +/- 3%)

The following shall be the specifications for the solar collectors. Collectors shall be SunEarth SunBelt model _____, and shall be of the glazed liquid flat plate type. Collectors shall be tested in conformance with ASHRAE 93-2003 and Solar Rating and Certification Corporation (SRCC)100-10, ISO 9806-1 & 9806-2 and have their thermal performance rated according to SRCC Document RM-1. The collectors shall be certified by SRCC and the Florida Solar Energy Center (FSEC), and listed by the International Association of Plumbing and Mechanical Officials (IAPMO).

GENERAL

The dimensions of the collector shall be _____ inches in length, _____ inches in width and 3.25 inches in depth. The collector casing shall be an anodized aluminum extrusion (alloy 6063 T6), minimum thickness 0.060 inch, with an architectural dark bronze finish. The casing shall have notched frame-walls for ease of plate removal and reinstallation. Sheet metal screwed fasteners shall be stainless steel (18-8 #10). The backsheet shall be painted textured aluminum not less than 0.014 inch thickness. A 1 inch vent plug shall be installed in each of the four corners of the backsheet to minimize condensation. An integral mounting channel shall allow the solar collector to be mounted without penetration of the extruded aluminum casing.

GLAZING

The collector glazing shall be one sheet of low iron tempered glass, with a minimum of 0.125 inch thickness (0.15625 inch on SB-40), and a minimum transmissivity of 85 percent (84 on SB-40). The glazing shall be thermally isolated from the casing by a continuous EPDM gasket. There shall be a continuous secondary silicone seal between the glass and casing capstrip to minimize moisture from entering the casing.

INSULATION

The insulation shall be foil-faced polyisocyanurate foam sheathing board of a minimum 1 inch thickness, siliconed in place to the aluminum backsheet. Total thermal resistance shall be a minimum of R-6.5. The sides and ends of the collector shall be insulated with a minimum of 1 inch foil-faced polyisocyanurate foam sheathing board.

ABSORBER PLATE AND PIPING

The absorber shall consist of a roll-formed copper plate of no less than 0.008 inch thickness. Risers shall be a minimum of 0.50 inch O.D. Type M copper tubing on no more than 4.56 inch centers continuously soldered to the plate utilizing a non-corrosive solder paste with a melting point of 460°F. The risers shall be brazed to 0.875" O. D. Type L copper manifolds utilizing a copper phosphorous brazing alloy with no less than a minimum 5 percent silver content, and conforming to the American Welding Society's BCuP-3 classification. EPDM grommets shall isolate the manifold from the aluminum casing. The absorber plate shall be designed for 160 psig maximum operating pressure and 400F maximum operating temperature.

ABSORBER COATING

Black Paint (SB Series): The absorber coating shall be flat black paint. The instantaneous efficiency of the collector shall be a minimum Y-intercept of 0.673 and a slope of no less than -1.175 BTU/ft²-hr-°F.

Note Please refer to the SRCC website at www.solar-rating.org for the actual y-intercept and slope for each collector.

Due to SunEarth's policy of continuous product improvement, specifications are subject to change without notice.

<p>MANUFACTURED BY:</p>  <p>8425 Almeria Avenue • Fontana, CA 92335 (909) 434-3100 • Fax (909) 434-3101 www.sunearthinc.com</p>	<p>AVAILABLE FROM:</p>
---	------------------------